


# A.S.S.

## Anti-Seize Spray

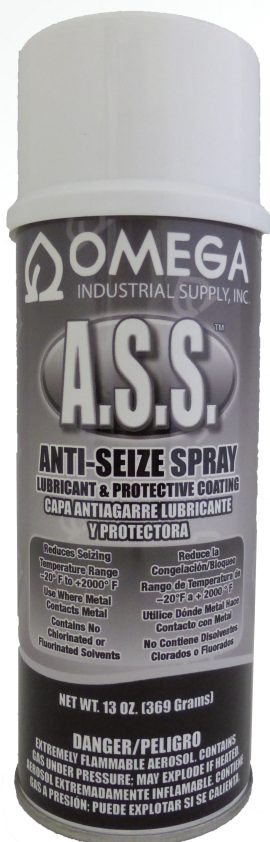

**A.S.S. ANTI-SEIZE SPRAY** is a thick general purpose spray lubricant, sealant and protective coating to use wherever metal contacts metal. Ensures quick and easy disconnection of bolts, spark plugs, threaded fittings, bushings and more while preventing galling, seizing and thread distortion. This heat resistant coating acts as a barrier to withstand extreme heat (up to +2000°F), pressure and friction. It shortens downtime, reduces costly replacements of parts, stops corrosion, is non-melting, waterproof and highly resistant to chemicals, solvents and gases (except oxygen). Will not wash off, melt, or harden. **A.S.S. ANTI-SEIZE SPRAY** contains synthetic oil, extremely fine aluminum and graphite particles and is recommended for use in temperature ranges from -35°F to 750°F. Does not contain any chlorinated or fluorinated solvents.

**Directions:** Shake can well before using. Clean surface thoroughly making sure area is free of grease and dirt by cleaning with Omega's **POW** heavy duty degreaser. Apply enough product to form a solid film over surface. Assemble and wipe off excess with degreaser.

Health	1
Flammability	3
Physical Hazard	1
Protection	G

### Areas of Use:

- \*Machine Shops
- \*Automotive Repair
- \*Mechanic Shops
- \*Industrial Plants

- \*Ship Yards
- \*Nuts, Bolts, Bearings, Valves, Rollers, Conveyers, Threaded Fittings, Spark Plugs etc.

Appearance and odor.....	Thick silver aerosol with aliphatic solvent odor.
Specific Gravity.....	0.930 @77°F (25°C)
VOC % .....	40%
Net Wt. ....	13 oz.

## *Omega Industrial Supply, Inc.*

Fairfield, CA 94534  
1-800-571-7347 [www.onlyomega.com](http://www.onlyomega.com) Fax: 707-864-8134