


# Graphite Lube



## High Temp Dry Graphite Lubricant

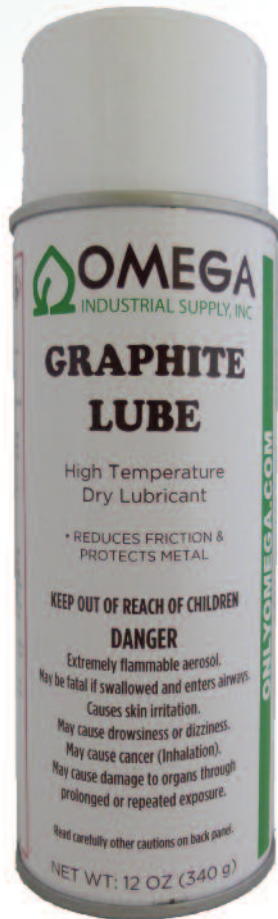

**GRAPHITE LUBE** is an aerosol, extra duty, high temperature, dry lubricant that is portable and easy to use. When used as directed, **GRAPHITE LUBE** will leave a thin film layer of graphite that not only lubricates, but penetrates deeply into difficult areas to prevent corrosion and eliminate friction on metal surfaces.

**Directions:** Shake well before using. Hold nozzle 6 - 8 inches from surface requiring lubrication. Generously apply to surface requiring lubrication. Reapply as necessary to maintain lubrication level. Clean nozzle after each use by inverting can and spraying.

### Areas of Use:

Health	3
Flammability	4
Reactivity	0
Protection	-

- \*Industrial Plants
- \*Shipyards
- \*Fork Lift Masts
- \*Ladle Pins
- \*Rollers
- \*Mining Operations
- \*Cold Storage
- \*Fleet Vehicles
- \*Bushings
- \*Lug Bolts
- \*High Speed Open End Shafts

Appearance and Odor.....	Grey liquid, Hydrocarbon odor
VOC Content .....	> 90 %
Net Wt .....	12 OZ

***Omega Industrial Supply, Inc.***

Fairfield, CA 94534  
 1-800-571-7347 [www.onlyomega.com](http://www.onlyomega.com) Fax: 707-864-8134